

TORO**Count on it.**

Super 600 Series

S P R I N K L E R S**RESIDENTIAL • COMMERCIAL**

For residential and light commercial applications, these rugged, reliable sprinklers are an exceptional value. Super 600 offers three interchangeable nozzles and balanced precipitation rates to provide flexibility and convenience.



Toro Super 600 Series Sprinkler

35'–50' (9,2–15,2m) Radius

Features

- Full-circle and adjustable part-circle (45°–315°) models
- Choice of three interchangeable nozzle turrets
- Balanced precipitation rate nozzles
- Adjustment screw allows up to 25% radius reduction
- Gear-drive design for longer life
- Basket filter screen to prevent clogging
- Stainless steel retraction spring
- Wiper seal
- Durable engineering plastic and stainless steel construction
- Small surface diameter
- At-grade installation for safety
- Recycled water identification plug available

- Hidden arc adjustment prevents tampering or vandalism
- Two-year warranty

Specifications

- Flow rate: 1.20–6.71 GPM (5–25 LPM)
- Recommended operating pressure: 25–50 psi (1,7–3,5 Bar)
- Maximum operating pressure: 75 psi (5,2 Bar)
- Trajectory: 28°
- Pop-up to nozzle: 2" (50mm)
- 3/4" (20mm) female-threaded inlet
- Dimensions:
 - Body diameter: 2 3/8" (59mm)
 - Cap diameter: 3" (75mm)
 - Height: 6 1/4" (159mm)

Lawn Pop-up Apex @ 40 psi (2,7 Bar)

Nozzle	28°	
	Max. Height of Spray	
1.3	10' 0"	(3m)
2.5	14' 0"	(4,2m)
5.0	10' 11"	(10,2m)

Note: Specifications subject to change without notice.


For more product and warranty information, contact your local Toro distributor.

Super 600 Performance Data—U.S.


Pattern	Desc.	psi	GPM	Radius	Prec. Rate*	
					△	□
▲	1.3	25	1.20	35'	.11	.09
		30	1.27	37'	.10	.09
		35	1.36	38'	.10	.09
		40	1.45	39'	.11	.09
		45	1.53	39'	.11	.10
◐	2.5	25	2.38	41'	.16	.14
		30	2.56	42'	.16	.14
		35	2.77	43'	.17	.14
		40	2.94	44'	.17	.15
		45	3.14	45'	.17	.15
●	5.0	25	4.82	38'	.37	.32
		30	5.19	42'	.33	.28
		35	5.69	45'	.31	.27
		40	6.07	47'	.31	.26
		45	6.41	48'	.31	.27
50	6.71	50'	.30	.26		

Super 600 Performance Data—Metric

Pattern	Desc.	Bar	LPM	Radius
▲	1.3	2,5	5,2	11,7
		3,0	5,7	11,9
		3,5	6,1	12,2
		2,0	9,6	12,7
◐	2.5	2,5	10,6	13,2
		3,0	11,7	13,6
		3,5	12,8	13,7
		2,0	19,4	12,6
●	5.0	2,5	21,9	13,9
		3,0	23,9	14,5
		3,5	25,6	15,3

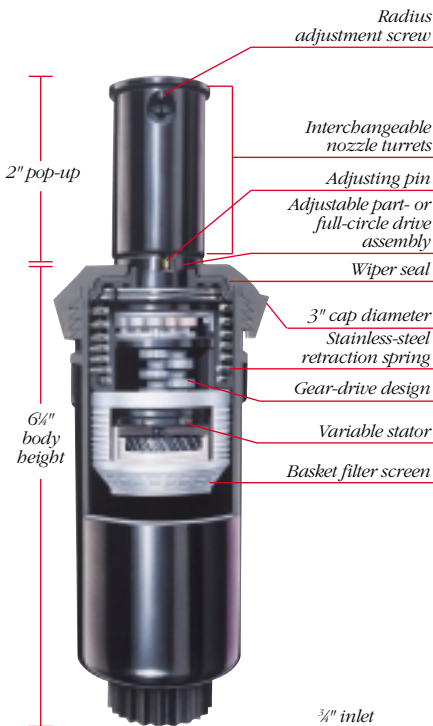

Specifying Information

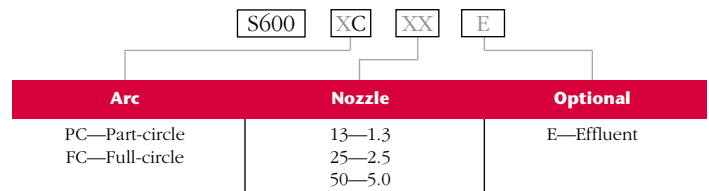

Example: A Super 600 Series Sprinkler with a 360° arc and 5.0 nozzle, would be specified as: **S600-FC-50**

Super 600 is a registered trademark of The Toro Company.



The Toro Company • Irrigation Division • An ISO 9000-certified Company

• PO Box 489 • Riverside, CA • 92502 • (800) 664-4740 • www.toro.com

©2003 The Toro Company • All Rights Reserved • March 2003